

Jabra Pro 9450 Mono Flex

How to connect my Jabra Pro 9450 with Nortel IP 1120E, 1140E, 1150E, 1165E

Prerequisite:

Jabra Pro 9450 + Jabra Link 14201-32

In combination with one of the following phones:

- Nortel IP 1120E
- Nortel IP 1140E
- Nortel IP 1150E
- Nortel IP 1165E

from firmware release 3.1 for IP phones.

Connection:

1. Connect the 1-sided end (USB plug) of the EHS adapter with the USB socket on your phone phone.
2. Insert the RJ10 plug into the socket marked with a “phone” symbol and the RJ45 plug into the socket marked with "AUX" on the base.

You now have the option of setting up the headset on your phone via the automatic or manual configuration.


Automatic configuration:

To start the automatic configuration, have someone call this phone and wait at least 10 seconds before taking the call. The appropriate EHS mode should now be installed.

If the automatic configuration has not worked, please select DHSG mode manually.


Base setup:

Set the phone set-up switch to position "A".

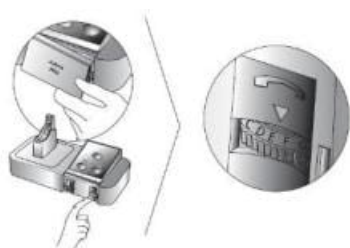


Microphone level setup:

Remove the cover from the base of the Jabra Pro 9450 and make a call with the headset, to a colleague for example. If you are too loud or too quiet to the person you are calling, please use the volume adjuster until you achieve the optimum volume level.

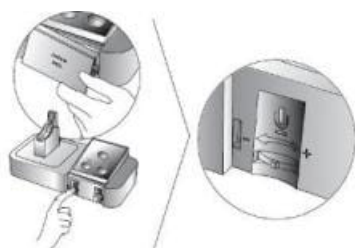

Phone setup:

Press the "service" button  twice > Default settings > Headsets > USB

In the menu, you must also activate the "Enable HID Commands" option. See below.

