

# Jabra GN9125 Duo Flex NC

## How to connect my Jabra GN9120 EHS / GN9125 EHS with Alcatel Touch 4029, 4039

### Prerequisite:

Jabra GN9120 EHS + Jabra Link 14201-09


Jabra GN 9125 EHS + Jabra Link 14201-09

In combination with one of the following phones:

- Touch 4029
- Touch 4039

### Connection:

Connect the MSH connection cable to the base of the Jabra GN912x EHS

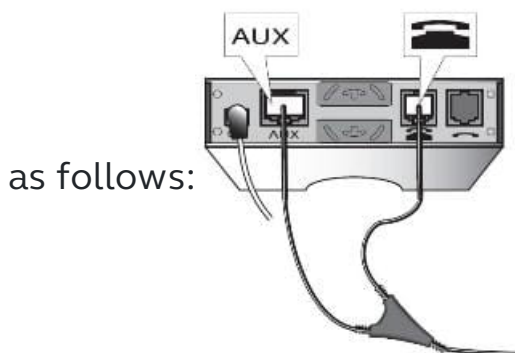


2 modular plugs (RJ10+RJ45)

**2-sided end:** Insert the RJ45 into the socket identified with "AUX" and the RJ10 into the socket identified with the complete "phone" symbol on the base.

**2-fold Y-coupling end:** Insert the 3.5 mm phone jack into the headset interface and the RJ12 into the "bell" socket of the phone. The

additional socket on the Y coupling remains free in the case of connection to an IP phone!

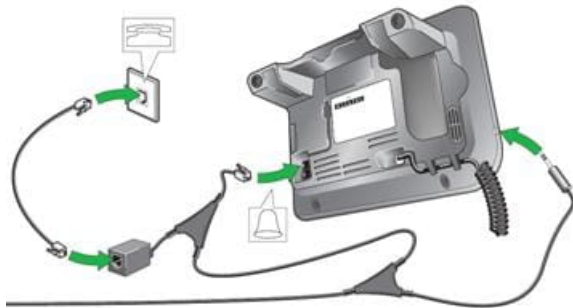

### Base setup:



The adjustment controller on the base must be set to "A".

### EHS setup:


The Jabra GN912x must support and be set up on MSH EHS.

You can check or set it as follows:

1. Place the headset on the base.
2. Then press the PLUS and MINUS buttons simultaneously for 6

seconds until the online display on the headset starts to flash.

3. The base will now to you display the EHS currently installed. The online light indicates "MSH", the pulsating light indicates "RHL", the MUTE light "DHSG" and the battery display "AEI".

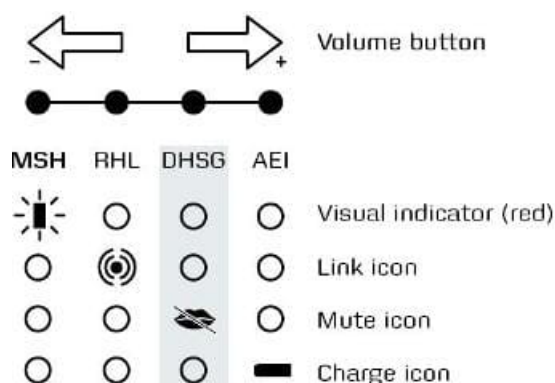

4. With the PLUS or MINUS buttons, you can now switch between the different EHS types
5. To confirm the EHS has successfully installed, the phone automatically switches back to charge mode after approx. 10 seconds.

### Microphone level setup:

1. Please call someone with the headset.
2. You must now simultaneously press the PLUS and MINUS buttons on the headset which immediately produces a signal tone.



3. You can now increase the microphone volume with PLUS or decrease

the volume with MINUS.

4. To confirm, after approx. 15 seconds a low signal tone sounds in the background. The settings are then automatically saved.

#### **Phone setup with system software 9.xx and higher:**

Settings are no longer required for using the headset on the phone. After correctly adapting the phone plug, a headset symbol must now appear in the "phone display". Should the headset symbol not appear, please check the following settings:

Menu > Settings > Phone > Phone plug > Activate/select headset.

#### **Phone setup with system software below 9.xx:**

**Important:** The "Force Headset" function must not be activated on the phone, as otherwise it will not be possible to accept external calls.

Menu > Settings > Phone > Phone plug > Force headset OFF

Menu > Settings > Phone > Socket > Activate headset

#### **Dial tone signal / phone setup:**

**Important:** The dial tone signal in the headset is only transmitted if one of the following call tones has been selected on your phone Standard / Classic / Cold River / Dooing-Dooing . > Menu > Settings > Dial tone > Internal / External

In the event that you still do not have a dial tone signal transfer despite setting the correct ring tone, check the following settings:

Menu > Settings > Phone > Internal / External > other options

No tone, Progressive, Bleep tones > all items must be set to "OFF".

Calls over the headset can be connected / forwarded as follows:

Dial phone number > the following now appears in the phone display  
"transfer" > now press the appropriate function button next to the  
phone display > when connected you must now end the call using the  
button identified with the "handset".