

Jabra Link 14201-32

How to connect my Jabra GN9120 EHS / GN9125 EHS with Nortel IP 1120E, 1140E, 1150E, 1165E

Prerequisite:

Jabra GN9120 EHS + Jabra Link 14201-32 (from FW 2.2.0)

Jabra GN9125 EHS + Jabra Link 14201-32 (from FW 2.2.0)

In combination with one of the following phones:

- Nortel IP 1120E
- Nortel IP 1140E
- Nortel IP 1150E

There is a minimum revision level (UNISlim 5.2) needed when using our EHS adapter on Nortel 1140e with CS2100 server. The CS1000 is OK with 3.1 or greater. It can be downloaded from <http://support.nortel.com>.

Connection:


1. Connect the 1-sided end (USB plug) of the EHS adapter with the USB socket on your phone.
2. Insert the RJ10 plug into the socket identified with the "phone" symbol and the RJ45 plug into the socket identified with "AUX" on the base.

EHS setup:

The Jabra GN912x must support and be set up on DHSG EHS.

Proceed as follows to check the EHS installed:

1. Place the headset on the base and press the PLUS and MINUS buttons simultaneously for approx. 6 seconds until the online display on the headset starts to flash.
2. The base will now display to you the EHS currently installed. The online light indicates "MSH", the pulsating light indicates "RHL", the MUTE light "DHSG" and the battery display "AEI".

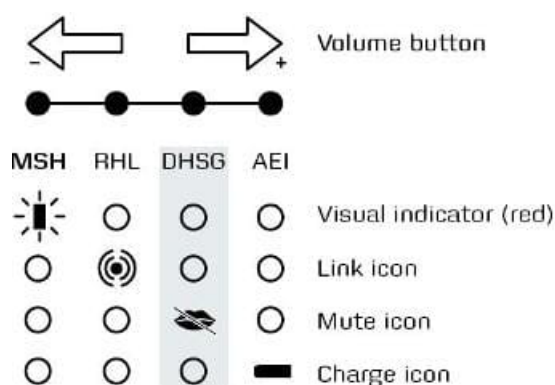

3. With the PLUS or MINUS buttons, you can now switch between the different EHS types.
4. To confirm the EHS has successfully installed, the base automatically switches back to charge mode after approx. 10 seconds.

Base setup:

Set the phone set-up switch (A-G) to "A".



Microphone level setup:


1. To do this, please call someone with the headset.
2. You must now simultaneously press the PLUS and MINUS buttons on the headset which immediately produces a signal tone.



3. You can now increase the microphone volume with the PLUS or decrease it with MINUS.
4. To confirm, after approx. 5 seconds a low signal tone sounds in the headset. The settings are then automatically saved.

Phone setup:



You must enable Headset option on the telephone. Services /Telephone Options / On Hook Default Audio Path / Headset Enabled. When phone is idle, customer must press "Services" button  twice quickly. Then there will be one of two options: If they see "password", enter default: "26567*738" then follow the below info. If they see "Preferences", then they choose "3" for headset/active headset device and select "USB". Be

sure "HID commands" is enabled. Press "apply" to save the settings. Also be sure phones (idle & active) ring settings are set to "default".