

Jabra Pro 920 Mono

How to connect my Jabra Pro 92x with Alcatel IP Touch 4028, 4038, 4068

Prerequisite:

Jabra Pro 92x + Jabra 14201-36 cable

In combination with one of the following phones:

- IP Touch 4028
- IP Touch 4038
- IP Touch 4068

Connection:


2-sided end:

Insert the RJ45 plug (red band) into the red socket marked with "AUX" and the RJ10 plug (blue band) into the blue base socket of the Jabra Pro 92x marked with a "phone" symbol.

2-fold Y-coupling end:

Insert the 3.5 mm audio jack into the headset interface and the RJ12 plug into the bell socket of the phone. The extra connector socket on the Y-coupling remains free for connection to an IP phone!

Now you can setup the headset for your phone with the automatic or manual configuration.

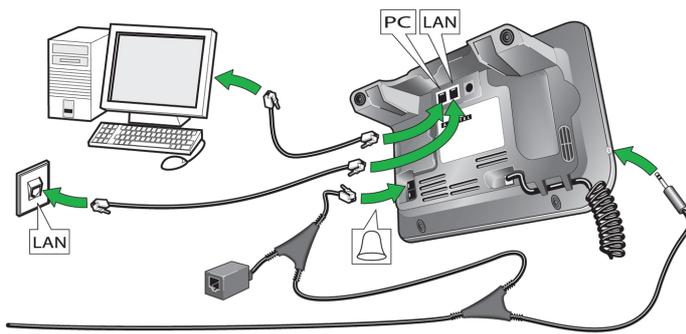


Automatic configuration:

To start the automatic configuration, please let someone call you on this phone; wait at least 10 seconds before you pick up the phone. Now the appropriate EHS mode should be set up.


If the automatic configuration did not work, please select the MSH mode manually. (See manual).

Base setup:

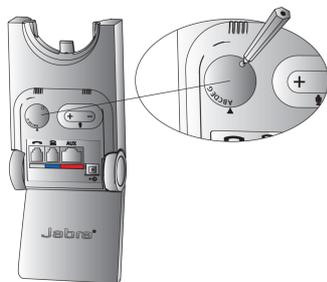

Set the phone setup switch to position "A".

Microphone volume setting:

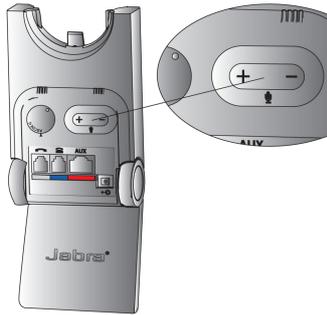

Put on the headset and call a colleague, for example.

Now you can select the desired microphone volume using the +/- button.

Phone setup with system software version 9.xx and higher:

No settings are required on the phone to use a headset. Following the correct adaptation of the audio jack, a headset symbol should appear in the “Phone display”. If the headset symbol does not appear, please check the following settings:

Menu> Settings> Phone> Audio Jack> Headset/Activate/Select.

Phone setup with system software version below version 9.xx:

Important: The “Force Headset” function must not be activated on the phone, as otherwise it will not be possible to accept external calls.

Menu> Settings> Phone> Audio Jack>Force headset OFF

Menu> Settings> Phone> Socket > Activate headset

Dial tone signal transfer/ phone setup:

Important: The dial tone signal in the headset is only transmitted if one of the following ringtones is used, e.g. Standard/ Classic / Cold River / Dooing-Dooing. > Menu> Settings> Dial Tone > Internal / External

Should the dial tone signal transfer not work although you have setup the correct ringtone, please check the following settings:

Menu > Settings > Phone > Internal/External, more options

No sound, Progressive, Beeps> all points must be set to "OFF".

Calls being made via the headset can be connected / forwarded as follows:

Dial the phone number > "Forward" will now appear in the phone display
> now press on to the appropriate function key next to the phone display
> thereafter you must end the call with the button marked "Handset".